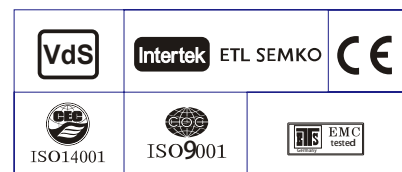


Specification

Nominal Voltage	2V	
Nominal Capacity(10HR)	400.0AH	
Dimension	Length	210±3mm (8.27 inches)
	Width	175±2mm (6.89 inches)
	Container Height	330±3mm (12.99 inches)
	Total Height (with Terminal)	339±3mm (13.35 inches)
Approx Weight	Approx 28.0 kg	
Terminal	T11	
Container Material	ABS	
Rated Capacity	435.4 AH/21.77A	(20hr, 1.80V/cell, 25°C/77°F)
	400.0 AH/40.00A	(10hr, 1.80V/cell, 25°C/77°F)
	351.0 AH/70.2A	(5hr, 1.75V/cell, 25°C/77°F)
	316.8 AH/105.6A	(3hr, 1.75V/cell, 25°C/77°F)
	239.5 AH/239.5A	(1hr, 1.67V/cell, 25°C/77°F)
Max. Discharge Current	2800A (5s)	
Internal Resistance	Approx 0.65mΩ	
Operating Temp. Range	Discharge : -20~55°C (-4~131°F)	
	Charge : -10~45°C (14~113°F)	
	Storage : -20~50°C (-4~122°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 100A. Voltage	
	2.40V~2.50V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	2.25V~2.30V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	GEL series batteries may be stored for up to 9 months at 25°C(77°F) and then a freshening charge is required.	
	For higher temperatures the time interval will be shorter.	


Applications

- ◆ Telecommunications
- ◆ Solar system
- ◆ Wind power system
- ◆ Engine starting
- ◆ Wheelchair
- ◆ Floor cleaning machines
- ◆ Golf trolley
- ◆ Boats


Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	355.1	279.2	212.8	184.9	118.0	93.4	74.5	64.3	55.5	49.2	44.3	40.5	38.3	20.90
1.80V/cell	407.8	311.8	235.1	204.1	127.8	100.1	79.0	67.6	58.3	51.4	46.5	42.6	40.0	21.77
1.75V/cell	458.0	342.9	253.6	218.0	135.3	105.6	82.8	70.2	60.3	53.3	48.0	43.9	40.8	22.20
1.70V/cell	493.5	367.3	269.4	231.0	143.5	110.0	85.4	72.3	62.4	55.0	49.4	45.0	41.8	22.51
1.67V/cell	513.1	382.0	279.2	239.5	147.1	113.6	87.6	73.9	63.5	55.9	50.1	45.7	42.3	22.71
1.60V/cell	555.9	408.2	299.9	254.3	153.1	118.1	90.8	76.2	65.0	57.0	51.0	46.6	43.1	23.04




Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	674.3	533.8	409.4	357.2	228.7	181.5	145.4	126.0	109.1	96.9	87.6	80.1	75.8	41.4
1.80V/cell	764.1	590.6	448.1	392.2	246.4	193.9	153.5	131.9	114.2	101.0	91.5	84.1	79.1	43.1
1.75V/cell	848.6	642.2	479.1	416.7	260.3	204.2	160.4	136.4	117.8	104.4	94.2	86.5	80.5	43.9
1.70V/cell	904.5	683.3	507.0	440.1	274.7	212.0	165.1	140.2	121.7	107.7	96.9	88.6	82.4	44.4
1.67V/cell	929.7	701.0	520.7	452.7	280.3	217.9	168.7	142.7	123.3	108.9	98.0	89.6	83.2	44.8
1.60V/cell	996.2	744.1	556.2	478.1	290.2	225.5	174.5	146.7	126.0	110.9	99.6	91.4	84.7	45.4


Dimensions

T11 Terminal


Unit: mm [inches]

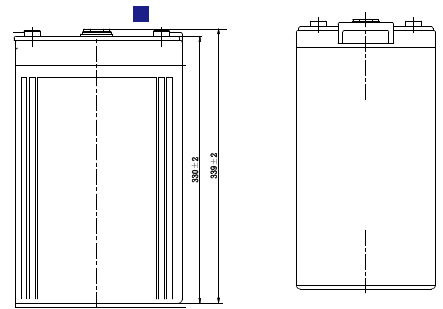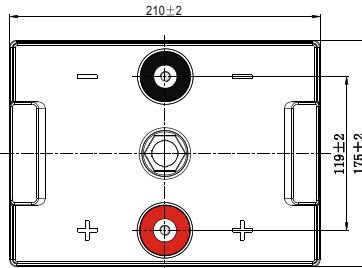


Discharge Characteristics

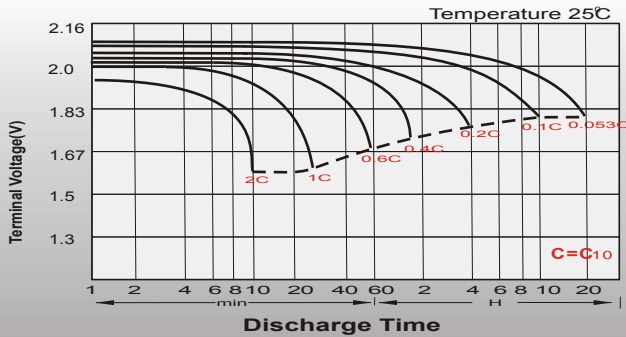


Float Charging Characteristics

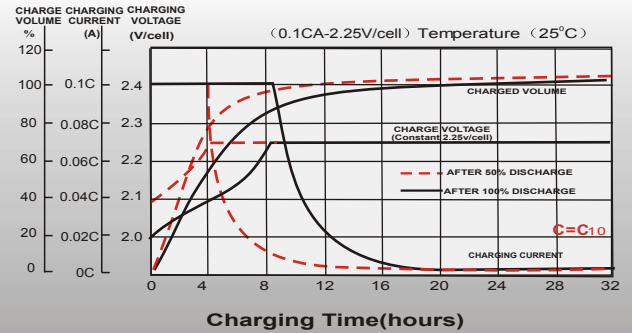


Temperature Effects in Relation to Battery Capacity

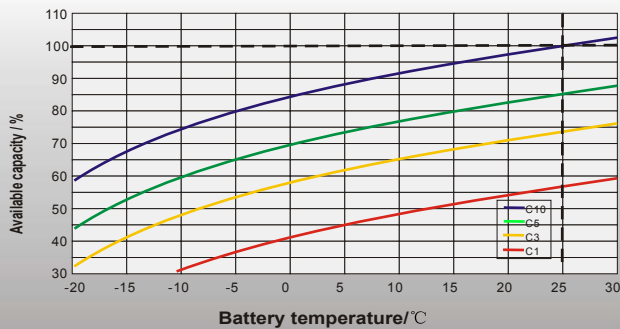


Effect of Temperature on Long Term Float Life

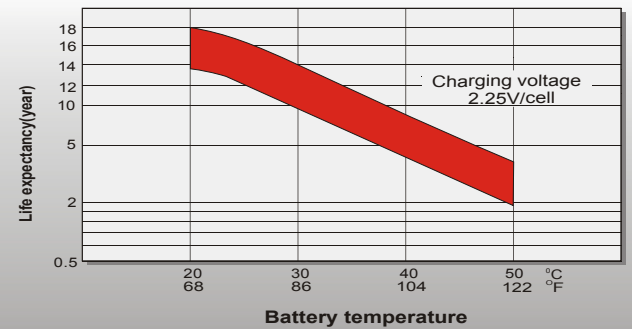

Cycle Life in Relation to Depth of Discharge

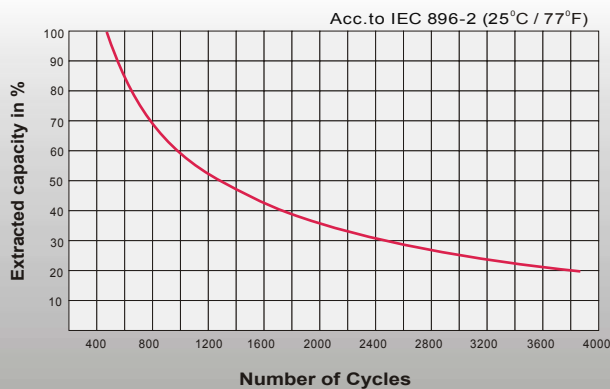

General Relation of Capacity VS. Storage Time

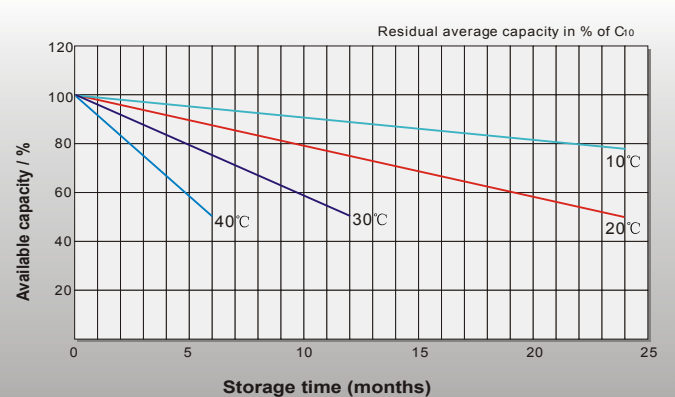

Contact US

Greensun Solar Energy Tech Co., Limited

- * Add: No 2000 Changjiang West Road, Shushan District Hefei China
- * Email: info@greensunpv.com
- * Phone: 0551-69866216 Fax: 0551-69866218 Mob: 0086-158 5511 0194
- * Web: <https://www.greensunpv.com> & <https://greensunpv.en.alibaba.com>